




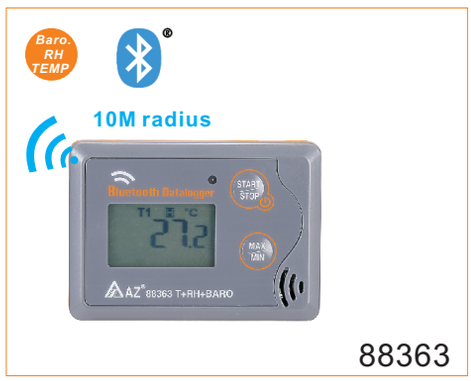

Ordering Code

VZ88362AZ, 88362 logger

VZ88363AZ, 88363 logger

***Available for EB project**

Bluetooth 4.0 Barometric Pressure, Humidity&Temperature logger 88362/88363

- ■Programming logger & download data wirelessly through advanced bluetooth 4.0 technology
- ■Saving your cost by collecting recording data in seconds
- ■Free iOS & Android APP are provided for smart devices
- ■Generate and send out PDF/CSV report through APP. Report contains data summary, graph and detailed data
- ■Big LCD provides real time data every 5 seconds.
- ■Dual color LED are used as status and alarm indicators

Metric/ Imperial | MAX/MIN | Auto Logging | PDF | CSV | EN 12830 *(Design to meet)*

BLE 4.0 | IP65 | LED Alarm | Magnetic Hanger

Model	88362	88363
Temp. range	NTC thermistor, -30~70°C , -22~158°F	
Temp. resolution	0.1°C , 0.1°F	
Temp. Accuracy	+/-0.5°C	
Humidity range	Capacitor, 0.1~99.9%rH	
Humidity resolution	0.1%rH	
Humidity Accuracy	+/-3% (at 25°C, 10~90%), others +/-5%	
Barometric pressure		300~1100hPa ,8.9~32.5inHg
Baro. resolution		0.1hPa, 0.1inHg
Baro. Accuracy		+/-3hpa (0~60C), +/-5hpa(-20~0C), Accuracy is not specified in another temp. Range.
Sampling points	24K: T & 24K:RH	16K:T , 16K:RH, 16K:Baro
Meter size	Meter:70(L)*50(W)*23(T) mm ; LCD:30(L)*18(W)	
Operating temp.	-30~70°C	
Operating RH%	Humidity < 90%	
Storage temp.	-40~85°C	
Storage RH%	Humidity < 90%	
Weight	~70g	
Battery	1PC 3.0V CR2, 1 year life time while BLE broadcast & alarm is OFF 3 months life time while BLE broadcast is ON	
Sampling interval	10 seconds to 120 minutes	
Start delay	0~1440 minutes, 10 mins/step	
Alarm range	Programmable from -30 to 70°C	
Alarm delay	0~720minutes, 5 mins/step	
Alarm type	Single Event, Cumulative, Disable	
Operation keys	2 Keys (Start/Stop key & Max/Min key)	
LED indicator	REC, High / Low alarm	
Standard package	Logger, batteries, manual, paper box	



