

INDOOR AIR QUALITY CHECKER



Optional



CAL. SALT BOTTLE
P/N: VZ0033AZ1 (33%)
P/N: VZ0075AZ1 (75%)
FOR 7755/77535
CALIBRATION USE



9V UNIVERSAL ADAPTOR
P/N: VZ109BAZ
100~240VAC INPUT
9V OUTPUT


Ordering Code

VZ7752AZ, 7752 meter
VZ7755AZ, 7755 meter
VZ77532AZ, 77532 meter
VZ77535AZ, 77535 meter
VZ109BAZ, 9V universal adaptor
VZ0033AZ1+VZ0075AZ1, RH calibration
VZUSBAZM, software kit

*Available for EB project

Combo CO₂ & TEMP Portable Checker w/o humidity: 7752/77532 w/ humidity: 7755/77535

- Upgraded to meet EN 50543:2011 requirement
- Designed with NDIR (non-dispersive infrared) waveguide technology CO₂ sensor, low drift and stable
- Data output to PC every 2 sec. for on-line analysis
- Display 8 hrs TWA value (time-weighted average) & 15 minutes STEL value (short-term exposure limit)
- Housing design surrounds with rails to help air ventilation for quick and accurate response
- Easy to calibrate CO₂ at fresh air around 380-420ppm

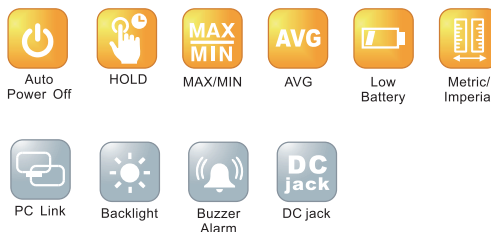

Model	7752	7755	77532	77535
<u>Measuring range</u>				
CO2	0~9999 ppm,		0~9999 ppm,	
Temperature	-10~60°C (14~140°F)			
Humidity	0.1~99.9% RH		0.1~99.9% RH	
Resolution	1ppm , 0.1°C/°F, 0.1%RH			
<u>Accuracy</u>				
CO2	±50ppm±5% of reading(0~2000ppm) Other range is 10% of reading		±30ppm±5% of reading(0~5000ppm) Other range is 10% of reading	
Temperature	±0.6°C/±0.9°F			
Humidity	±3%RH (at 25°C, 10~90%RH); ±5%RH (at 25°C, other range)		±3%RH (at 25°C, 10~90%RH); ±5%RH (at 25°C, other range)	
Warm-up time	30 seconds			

<u>Response time</u>		
CO2	<30 seconds(90% step change)	
Tair	<2 mins (90% step change)	
Humidity	<10 minutes (90% step change)	
RELAY(1A 30VDC/0.5A 125VAC)	NO	NO
LCD size (mm, HxW)	26x44	
Operating condition	0~50 ⁰ C , 0~95% RH (avoid condensation)	
Storage condition	-20~ 50 ⁰ C,0~95%RH(avoid condensation)	
Power supply	AA x 4pcs	
Battery life	> 24 hours (Alkaline battery)	
Meter size (LxWxH,mm)	205x70x56	
IP Rating	IP40	
EMC	EN 50270:2015	
Weight	200g	
Standard package	Meter, manual ,AA batteries , hard carry case	



USB CABLE & SOFTWARE
P/N: VZUSBAZM